



THE PERFECT LENGTH PANEL FOR THE WAY YOU FRAME



Features & Benefits

- ✓ Pre-trimmed for the way YOU frame
- ✓ Simplifies 2 story construction
- ✓ Nail lines spaced at 16" o.c. & 24" o.c.

You Save Money

- ✓ No Cutting
- ✓ Eliminate Hardware
- ✓ Less Waste & Disposal
- ✓ Increase Speed

THE PERFECT LENGTH PANEL FOR THE WAY YOU FRAME

BUILD FASTER

Framers simply match the wall height & joist depth to the right size panel for each story, while meeting code and reducing build times.

REDUCE COSTS

QuakeZone wall sheathing is manufactured to specific lengths, eliminating the need for trimming, waste, and disposal on the job site.


INCREASE PROFITS

QuakeZone sheathing eliminates metal hardware, trimming, waste and reduces labor and that means savings for two story construction.

THE OLD WAY

Time Consuming Trimming & Waste


Additional Metal Hardware & Labor

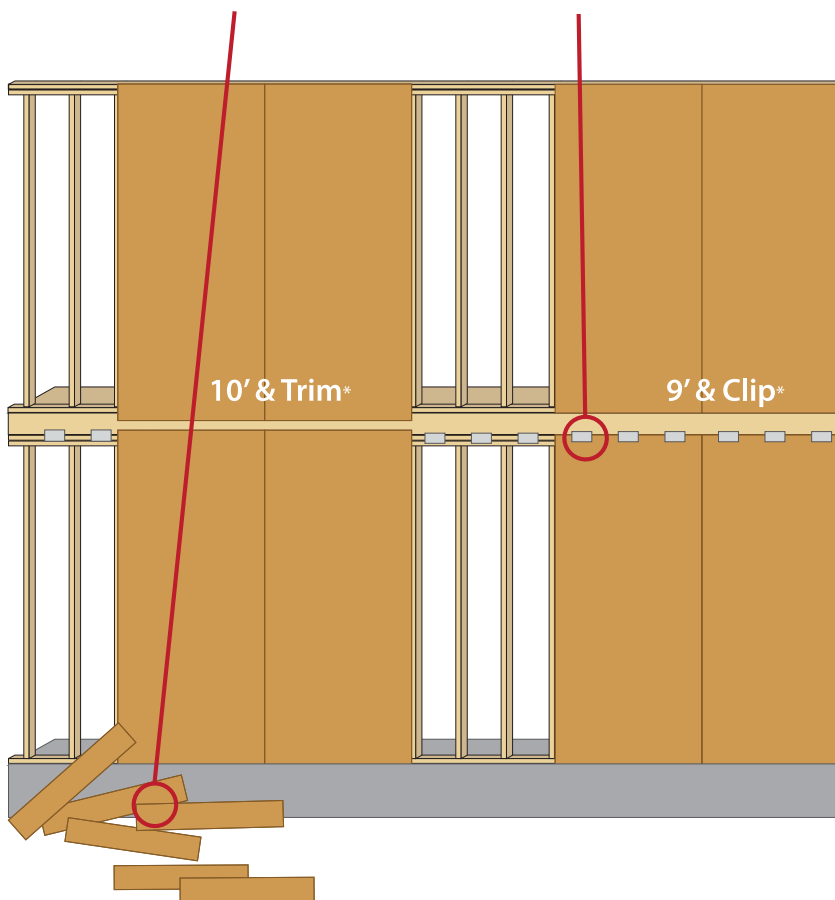

* Fastener Schedules per Design Professional Specifications

THE QUAKEZONE WAY

No Cutting, less hardware for any combination of plate height and floor framing depth!

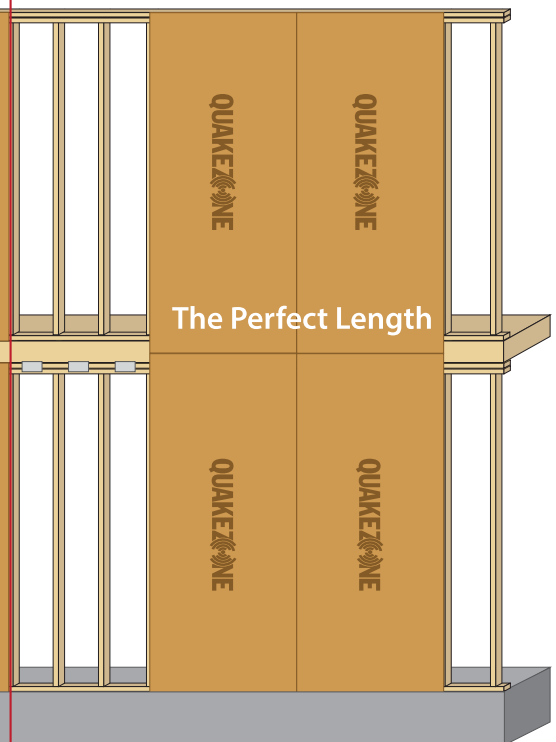

Less labor, less metal, less waste & disposal

SIZES & GRADES

QuakeZone wall sheathing is available in 3/8 Rated Sheathing

FOR MORE INFORMATION CONTACT
GREG.BATES@NORBORD.COM

QUAKEZONE
Wall Sheathing

 **Norbord**

PLATE HEIGHTS AND QUAKEZONE LENGTH SERIES ⁽¹⁾⁽²⁾⁽³⁾

| QuakeZone Length Series | Wall Framing Plate Height (ft-in) | | |
|-------------------------|-----------------------------------|----------|----------|
| | 8' 3/4" | 9' 3/4" | 10' 3/4" |
| | QuakeZone Lengths (in) | | |
| 14" I-joists | 103-7/8" | 115-7/8" | 127-7/8" |

(1) Other lengths and thicknesses are also available.
(2) Minimum order quantities apply.
(3) Sized for spacing between panels.

JUNE 2019